

PREMIUM CURED CONCRETE WET BLADES

WEL-CO Premium Cured Concrete Blades are manufactured with a high concentration of high quality diamonds. They are designed to be used on high horsepower saws for the fastest cut and lowest cost in production sawing. A wide range of bonds and diamond heights are available to match the blade with the job. Each blade has a wide cutability range to assure versatility from job to job.




Available Sizes

- 12" x .125
- 12" x .145
- 12" x .160
- 12" x .187
- 12" x .218
- 12" x .250
- 12" x .312
- 12" x .375
- 12" x .500
- 14" x .125
- 14" x .145
- 14" x .160
- 14" x .187
- 14" x .218
- 14" x .250
- 14" x .312
- 14" x .375
- 14" x .500
- 16" x .125
- 16" x .145
- 18" x .125
- 18" x .145
- 18" x .160
- 18" x .187
- 18" x .218
- 18" x .250
- 18" x .375
- 18" x .500
- 20" x .145
- 20" x .160
- 20" x .187
- 20" x .218
- 20" x .250
- 24" x .150
- 24" x .160
- 24" x .187
- 24" x .218
- 24" x .250
- 26" x .160
- 26" x .187
- 26" x .218
- 26" x .250
- 28" x .187
- 28" x .218
- 28" x .250
- 30" x .187
- 30" x .218
- 30" x .250
- 32" x .187
- 32" x .218
- 32" x .250
- 36" x .187
- 36" x .218
- 36" x .250
- 42" x .187
- 42" x .250
- 48" x .250

Cured Concrete Specs

C 10	Hard Aggregate — For fast cutting river rock aggregate with heavy steel reinforcing and dull sand
C 11	Hard Aggregate — For fast cutting river rock aggregate with heavy steel reinforcing and medium sand (gasoline engines)
C 15	Hard Aggregate — For fast cutting hard aggregate with heavy steel reinforcing and sharp sand (gasoline engines)
C 18	Medium to Hard Aggregate — For fast cutting hard granite and rose quartz aggregate
C 25	Soft Aggregate — For fast cutting limestone aggregate or other soft materials such as slag

Size	-12	-14	-16
18" x .125	\$ 678	\$ 732	\$ 786
20" x .160	\$ 942	\$ 1020	\$ 1092
26" x .160U	\$ 1188	\$ 1266	\$ 1350
26" x .160	\$ 1398	\$ 1494	\$ 1596
30" x .175	\$ 1794	\$ 1914	\$ 2034
36" x .187	\$ 2646	\$ 2808	\$ 2970

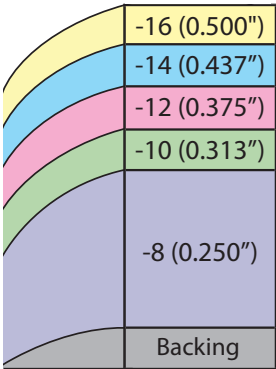

Diamond Height