





Saw Grit Diamond Blades

Published on Wednesday, 24 October 2012 11:22 | [Print](#) | [Hits: 8346](#)  

DIAMOND SAW BLADE BANKS FOR RECESSED PAVEMENT STRIPING

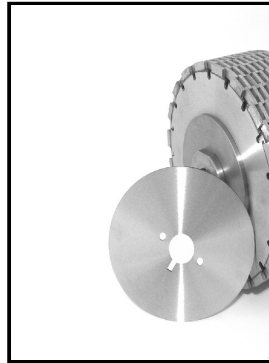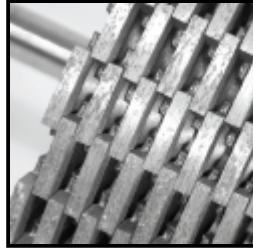

Common Rec Marker Requir

Model 94, 98, 101, 8

- 6 - Blade 20"x .250"
- 13 - Blade 18"x .250"
- 18 - Spacer 10"x .119"

Model 96 LP

- 6 - Blade 20"x .250"
- 17 - 18"x .250"
- 4 - Spacer 10"x .100"
- 18 - Spacer 10"x .119"

Model 96 LPS

- 2- Blade 19"x .375"
- 2- Blade 19"x .250"
- 17- Blade 18"x .250"

18 - Spacer 10"x .119"

Wel-Co is an American manufacturer of diamond blades, family owned since 1976. All of our products are built using strict guidelines to assure customers every blade is consistent. We only use the highest quality met diamonds in our products. Don't be fooled by private labeled blades and imports. Quality is not expensive. Quality is what today's contractor needs. If you are not using Wel-Co diamond tools you should be, your

Blade Sizes

12" x .125

12" x .250

14" x .250

16" x .250

18" x .250

Application with .25

Blades Required = Recept

Spacers = Number of bla

5" Bank = 19 Blades, 18

7" Bank = 26 Blades, 25

Application with .125

Blades Required = Recept

5" Bank = 33 Blades, 32

Custom sizes available!

Road Marking Bonds	
RM-10	Cured Concrete - Hard Aggregate w/Dull Sand
RM-15	Cured Concrete - Hard Aggregate w/Sharp Sand
RM-20	Cured Concrete - Medium Hard Aggregate
RM-25	Cured Concrete - Soft Aggregate
RM-40	Asphalt - Hard Aggregate or Occasional Cured Concrete
RM-60	Asphalt - Hard Aggregate
RM-68	Asphalt - Medium Aggregate
RM-70	Asphalt - Soft Aggregate

